



DECLARATION

Coswick Ltd. states that
Critical Radiant Flux of
Coswick 3-layer Engineered Hardwood flooring

is
0,35 watts/cm²


corresponding to
Class II rating (Minimum 0,22 watts/cm²)

CODE classification:

The 2015 Edition of NFPA 101 Life Safety Code, paragraph 10.2.7.4
The 2015 Edition of NFPA 5000 Building Construction & Safety Code, paragraph 10.2.7.4
The 2018 Edition of the International Building Code, paragraph 804.2

Test report № 3-40281-0
SGS Govmark, 96-D Allen Boulevard Farmingdale, New York 11735-5626 USA

Vladimir Ianovski, director
Zaslavl, 30 January 2023

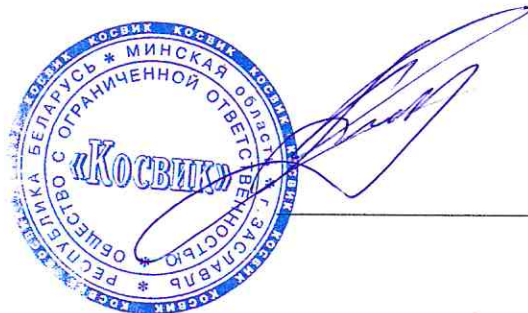

Coswick Ltd.
Y. Kolasa Str. 2B, Zaslavl, Republic of Belarus, 223034
Tel./Fax +375-17-543-20-12
E-mail: sales@coswick.com
www.coswick.com